

PRODUCT CODE 5466

## SmartCare Textured Crack Filler

SmartCare Textured Crack Filler is a single component, acrylic crack filler with a grainy texture. It fills plaster cracks in exterior surfaces upto 10 mm.



WATER BASED

asianpaints

**LEAD FREE\* GUARANTEE**

\* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

### PRODUCT BENEFITS

#### Grainy Structure

Grainy texture to match the roughness of exterior surfaces

#### Flexible

Accommodates minor movements in cracks to prevent it from reappearing

#### Easy to apply & clean


Easy to apply. Easy to clean. Non corrosive towards metals

#### Excellent Paintability

Paintable with waterbased and synthetic paints

### PRODUCT FEATURES

#### AVAILABLE PACKS

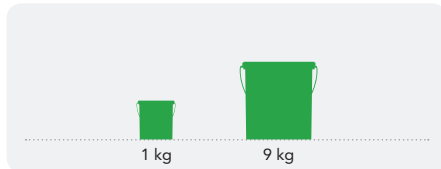

Shelf life: If stored in original sealed container, 12 months from the date of manufacturing

#### COLOURS AVAILABLE

**White\***



\*Please Note: Textured Crack Filler is a white coloured paste

#### COVERAGE



**55 running ft/kg**  
for a 5 x 5 mm crack

#### RECOMMENDED USAGE



Exterior surfaces with plaster cracks upto 10mm



### HOW TO APPLY

#### APPLICATION PROCESS

APPLICATION PROCEDURE

STEP 1 Open the crack and widen it to form a 'V' shaped groove with help of a chisel

STEP 2 Clean the area thoroughly so that it is free from dust and loose particles

STEP 3 Apply a self-priming coat [1:1 dilution with water] of SmartCare Textured Crack Filler over crack edges and allow it to dry for 1-2 hrs

STEP 4 Apply first coat of undiluted SmartCare Textured Crack Filler on the crack using spatula or putty knife

STEP 5 Press the paste firmly into the crack to ensure full contact with the surface and level the surface

APPLICATION PROCEDURE

STEP 6 Spread SmartCare Textured Crack Filler upto atleast 3 cm on either side of the crack for better adhesion

STEP 7 Apply in consecutive perpendicular layers to avoid leaving air pockets

STEP 8 Allow it to dry for a minimum 6 hours

STEP 9 Apply the second undiluted coat in the same manner

## ADDITIONAL INFORMATION

### POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

### TECHNICAL DETAILS

- a. **Base:** Acrylic
- b. **Density:** 1.91 g/ml
- c. **Skin Formation:** 7 minutes
- d. **Elongation @ break:** 65%
- e. **Sag, verticle:** less than 2mm
- f. **Joint Movement:** 7.5%
- g. **Shore A Hardness:** 28 Shore A

### PRECAUTIONS

- > Do not apply for cracks of more than 10 mm width.
- > Do not apply on wet surfaces/ area.
- > Meant for plaster cracks. Do not apply on structural or joint cracks

### SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints Textured Crack Filler which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.
- > Non flammable.