

PRODUCT CODE 5491

WoodTech Termishield

Asian Paints WoodTech Termishield is an herbal oil based clear additive, which offers excellent protection from termite.



SOLVENT BASED

PRODUCT BENEFITS

Anti-termite

Protects against termites and borers.

Use with all Topcoats

WoodTech Termishield be Used with Enamels & all WoodTech products.

Penetrative Coat

WoodTech Termishield does not impart any colour to wood.

PRODUCT FEATURES

DURABILITY



✓ EXCELLENT

HIGH

MEDIUM

LOW

COVERAGE

On smooth sanded wooden surface




1 COAT

8 - 9 sq.mtr/ltr/coat**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.


AVAILABLE PACKS

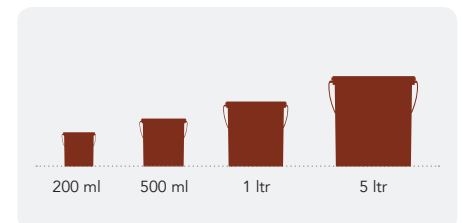

WoodTech Termishield (5491)- 100ml, 200ml, 500ml, 1ltr, 5 ltrs

HOW TO APPLY

PRE PAINTING STEPS

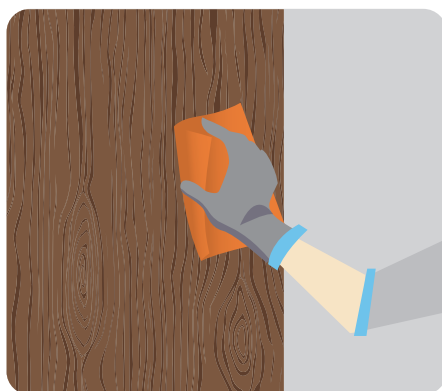

1. Sand the wooden surface along the grains using sand paper no. 180, and then 320 or 400. Wipe surface to clean off loose dust particles.

PAINT APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY	RECOATING PERIOD
STEP 1 WOODTECH TERMISHIELD FIRST COAT SPRAY/BRUSH/RAGGING/INJECT	5491	NA	NA	SPRAY 12 - 13 BRUSH 12 - 13 RAGGING 12 - 13 INJECT 12 - 13	2 HOURS
STEP 2 WOODTECH TERMISHIELD SECOND COAT SPRAY/BRUSH/RAGGING/INJECT	5491	NA	NA	SPRAY 12 - 13 BRUSH 12 - 13 RAGGING 12 - 13 INJECT 12 - 13	2 HOURS

Note:1. Do not sand the WoodTech Termishield Coat
 2. Surfaces treated with WoodTech Termishield must always be coated with Asian Paints Enamels or WoodTech Products.
 3. For over coating with any WoodTech products, allow the

"product" to dry for at least 18 hrs.
 4. WoodTech Termishield must not be polluted with other oil, varnish or the like.
 5. The containers should be tightly closed after use.

6. Recoat period is quoted for 30°C and 75% relative humidity, these may vary under different conditions.
 7. Viscosity as measured through a Ford cup B4 at 30°C.

ADDITIONAL INFORMATION

POST PAINTING CARE

For removing stains on tiles and metal surfaces, apply NC Thinner on the surface and wipe clean.

If stains are difficult to remove, scrapping can be done after applying NC thinner on the stained area.

Precautions need to be taken while spraying/brushing, like masking of adjoining areas with suitable material, as the stains may be difficult to remove if present on wood or coated wooden and wall surfaces.

TECHNICAL DETAILS

a. Drying time: Surface dry time 30 minutes.
Tack Free time 4 hrs.

b. Flash point (IS 101/1987, Part 1, Sec 6):
Above 60°C (140°F)

c. Stability of thinned paint: NA

d. Shelf Life: 36 months from date of manufacture in original tightly closed container away from direct sunlight and extensive heat.

PRECAUTIONS

- For optimum performance, Asian Paints WoodTech Termishield must be applied at a temperature between 20°C and 40°C and humidity not above 75%.
- Stir well.

SAFETY FEATURES

- Kindly refer to the MSDS for WoodTech Termishield, which gives detailed information on safety measures while handling the paint.
- Store the product at ambient conditions in well ventilated locations and away from source of ignition and fire.
- Avoid eye and skin contact. In case of eye and skin contact, wash with plenty of clean water.
- Do not inhale or ingest. In case of inhalation move to fresh air and seek medical attention if symptoms persist in both the cases.
- Work in well-ventilated area.
- Use protective equipments like rubber / polythene gloves, safety goggles / glasses, face mask while handling the paint.
- Dispose in land filling. Do not dispose in any drain or water-channel.