


PRODUCT CODE 6885

## SmartCare Ultra Block 2K

SmartCare Ultra Block 2K is a two-component acrylic polymer modified high performance coating system. Suitable for water retaining structure due to its excellent bonding, good waterproofing and excellent resistance to hydrostatic pressure by forming elastic seamless coating.



### PRODUCT BENEFITS

**Water Proofing**

Resists up to 5 bars of positive hydrostatic pressure.

**Elongation**

Highly elastic film which provides superior elongation.

**Anti-Efflorescence**

Provides lasting protection against efflorescence.

**Anti-Carbonation**

It protects concrete against carbonation.

**Seamless Coat**

Forms a seamless coat without any joints.

**Adhesion**


Excellent bond strength with cementitious substrates

**High Solid Content**

Acrylic Polymer with high solid content

**Usage**

Easy to apply.




**LEAD FREE GUARANTEE**



\* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

### PRODUCT FEATURES

#### AVAILABLE PACKS

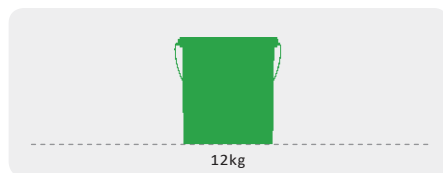


12kg


Shelf life: 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

#### COLOURS AVAILABLE

**Grey**




#### CONSUMPTION

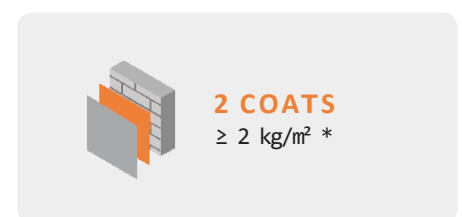

**2 COATS**  
≥ 2 kg/m<sup>2</sup> \*

#### DRYING TIME TO TOUCH



**4-6 HOURS**

#### RECOMMENDED USAGE



Any masonry surface, bricks / concrete that is subjected to damage from moisture and efflorescence, Wet areas like bathrooms, toilets, sunken portions, balconies etc., Swimming pools, water tanks and reservoirs and terraces.

### HOW TO APPLY

#### PRE-PAINTING STEPS



**SURFACE PREPARATION** Surface under treatment should be strong enough, clean and free from oil or loose materials. Masonry surface should be fully cured prior to application. In case of efflorescence, the plastered surface of affected areas to be removed & go up to the brick level. Surface cracks, undulations and voids must be repaired appropriately before application. Prior to application the surface must be in Saturated Surface Dry (SSD) condition.



**MIXING** Use mechanical mixer for homogenous mixing. In a clean suitable mixing vessel, slowly add powder to liquid (60 parts powder & 40-part liquid by weight) under stirring. Mix the entire quantity until get the smooth homogeneous slurry without lump is achieved. Keep the slurry undisturbed for 5/6 minutes to release entrapped air during mixing.

#### APPLICATION PROCESS

APPLICATION PROCEDURE

- STEP 1 Apply SmartCare Ultra Block 2K slurry by brush or roller over SSD masonry/brick surface.
- STEP 2 Allow the 1st coat to dry for 4-6 hrs (drying depends on ambient temperature) and then apply 2nd coat.
- STEP 3 The 1st coat & 2nd coat must be applied in perpendicular direction for better results.
- STEP 4 Ensure a consumption of at least 2 kg/m<sup>2</sup> in 2 coats.
- STEP 5 If the application is being done on bricks, overlay of cementitious screed within 24 to 48 hrs. For screeding use SmartCare Vitalia Neo as an integral waterproofing compound
- STEP 6 It is essential to cure SmartCare Ultra Block 2K/overlay screed for a minimum of 3 to 5 days to ensure full cement hydration

## ADDITIONAL INFORMATION

### POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

### PRECAUTIONS

- > Do not add water to Smart Care Ultra Block 2K during mixing/application
- > At least 3 to 5 days curing is required.
- > Always add powder to polymer, to ensure the mixture is free of lumps.
- > Do not cure by flooding with water or conduct any ponding test before it gets completely cured.
- > In case of fresh concrete/masonry substrate – the surface must be cured for 28 days before application.
- > Overlaying of cementitious screed/plaster must be done within 24 to 48 hrs.

### SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints SmartCare Ultra Block 2K which gives detailed information on safety measures.
- > Store the container with the lid tightly closed in an upright position, in a cool & dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.

### TECHNICAL DETAILS

Properties	Results	Test Method
Mix ratio (Powder: Liquid), parts by weight	60:40	
Surface Dry time, minutes	60	IS:101 P-3 Sec-1
Recoatibility time, hours	4	
Cure time after 2nd coat, days	3 – 5	
Film Thickness @ 2 coats, mm	1±0.1	ASTM D 3767:2003
Positive Hydrostatic Pressure	Resist up to 5 Bar Pressure	EN 12390-8:2019
Tensile Strength, MPa	1±0.2	ASTM D 2370:2016
Elongation at break, %	200±40	ASTM D 2370:2016
Adhesion strength, MPa	1.3±0.2	ASTM D 7234:2022
Crack Bridging, mm	2±0.2	EN 1062-7:2004

\* All above values & parameters tested at 2kg/m<sup>2</sup> consumption in 2 coats and obtained in a controlled lab test

\*Consumption may vary for highly absorbent surfaces e.g., AAC Blocks

\*Please ensure SSD condition of surface before application of 1<sup>st</sup> coat of SmartCare Ultra Block 2K

\*SmartCare Ultra Block 2K passes CFTRI Food Grade Certification