

PRODUCT CODE 5466

SmartCare Textured Crack Filler

SmartCare Textured Crack Filler is a single component, acrylic crack filler with a grainy texture. It fills plaster cracks in exterior surfaces upto 10 mm.



WATER BASED

asianpaints

LEAD FREE* GUARANTEE

* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

PRODUCT BENEFITS

Grainy Structure

Grainy texture to match the roughness of exterior surfaces

Flexible

Accommodates minor movements in cracks to prevent it from reappearing

Easy to apply & clean


Easy to apply. Easy to clean. Non corrosive towards metals

Excellent Paintability

Paintable with waterbased and synthetic paints

PRODUCT FEATURES


AVAILABLE PACKS

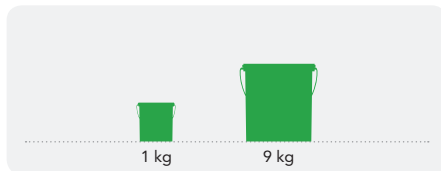

Shelf life: If stored in original sealed container, 12 months from the date of manufacturing

COLOURS AVAILABLE

White*



*Please Note: Textured Crack Filler is a white coloured paste

COVERAGE



55 running ft/kg
for a 5 x 5 mm crack

RECOMMENDED USAGE



Exterior surfaces with plaster cracks upto 10mm



HOW TO APPLY

APPLICATION PROCESS

APPLICATION PROCEDURE

STEP 1 Open the crack and widen it to form a 'V' shaped groove with help of a chisel

STEP 2 Clean the area thoroughly so that it is free from dust and loose particles

STEP 3 Apply a self-priming coat [1:1 dilution with water] of SmartCare Textured Crack Filler over crack edges and allow it to dry for 1-2 hrs

STEP 4 Apply first coat of undiluted SmartCare Textured Crack Filler on the crack using spatula or putty knife

STEP 5 Press the paste firmly into the crack to ensure full contact with the surface and level the surface

APPLICATION PROCEDURE

STEP 6 Spread SmartCare Textured Crack Filler upto atleast 3 cm on either side of the crack for better adhesion

STEP 7 Apply in consecutive perpendicular layers to avoid leaving air pockets

STEP 8 Allow it to dry for a minimum 6 hours

STEP 9 Apply the second undiluted coat in the same manner

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. **Base:** Acrylic
- b. **Density:** 1.91 g/ml
- c. **Skin Formation:** 7 minutes
- d. **Elongation @ break:** 65%
- e. **Sag, verticle:** less than 2mm
- f. **Joint Movement:** 7.5%
- g. **Shore A Hardness:** 28 Shore A

PRECAUTIONS

- > Do not apply for cracks of more than 10 mm width.
- > Do not apply on wet surfaces/ area.
- > Meant for plaster cracks. Do not apply on structural or joint cracks

SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints Textured Crack Filler which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.
- > Non flammable.