

PRODUCT CODE 2361

## Professional Acrylic Distemper

Asian Paints Professional Acrylic Distemper is a water-based, interior wall paint. It gives walls a smooth and matt finish. Its fortified formulation delivers a combination of good looks and durable performance.

### PRODUCT BENEFITS

#### Environment friendly

Asian Paints Professional Acrylic Distemper is based on an acrylic co-polymer formulation. It is environment friendly, contains no added lead, cadmium, mercury or arsenic.

#### Finish


It has a high wet edge time which gives a uniform matt finish.

#### Durability

It has a high durability with strong anti-chalking performance.

#### Maintenance

This product has been specifically formulated such that it is easy to maintain.



asianpaints


LEAD FREE\* GUARANTEE




\* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

### PRODUCT FEATURES

#### WASHABILITY

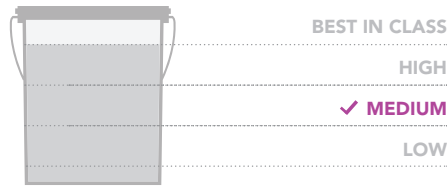


#### AVAILABLE PACKS

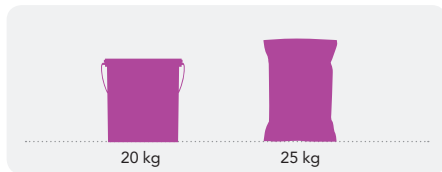

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


#### COLOURS AVAILABLE

# White



Please note: Asian Paints Acrylic Distemper is an interior wall paint.

#### FINISH

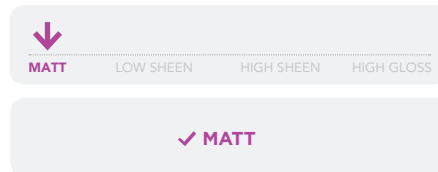

Refer to sheen levels in technical details

#### COVERAGE

On smooth primed masonry surface



\*\*Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

### HOW TO APPLY

#### PRE PAINTING STEPS



**PLASTER** New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



**CLEANING** Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints DampBlock to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints Exterior Sealer (X1).



**FILLING FOR CRACKS** For filling cracks upto 3mm use Asian Paints Crack Seal.



**FILLING FOR HOLES & DENTS** In case of dents and holes use Asian Paints Acrylic Wall Putty or white cement and fine sand in the ratio 1:3

**Professional Acrylic Distemper should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.**

#### PAINT APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY <sup>1</sup>	RECOATING PERIOD
STEP 1 PROFESSIONAL PRIMER BRUSH / SPRAY	0087 0086	MTO* OR WATER	BRUSH 8 - 10 SPRAY 12 - 15	BRUSH 30 - 40 SPRAY 20 - 25	6 - 8 HRS
STEP 2 ASIAN WALL PUTTY PUTTY KNIFE	1354	WATER	SMALL AMOUNTS TO IMPROVE FLOWABILITY	N/A	4 - 6 HRS
STEP 3 PROFESSIONAL PRIMER BRUSH / SPRAY	0087 0086	MTO* OR WATER	BRUSH 8 - 10 SPRAY 12 - 15	BRUSH 30 - 40 SPRAY 20 - 25	6 - 8 HRS
STEP 4 SANDING	SAND THE SURFACE WITH EMERY PAPER 320 AND WIPE CLEAN				
STEP 5 FIRST COAT PROFESSIONAL ACRYLIC DISTEMPER BRUSH / ROLLER	2361	WATER	50 - 60	N/A	6 HRS
STEP 5 SECOND COAT PROFESSIONAL ACRYLIC DISTEMPER BRUSH / ROLLER	2361	WATER	50 - 60	N/A	6 HRS

1. As measured through a Ford cup.

2. Recoat period is quoted for 30°C and 60 - 65% Relative Humidity, these may vary under different conditions.

\* Mineral Turpentine Oil

## ADDITIONAL INFORMATION

### VOC CONTENT



Asian Paints Professional Acrylic Distemper meets LEED VOC criteria as per Indian Green Building Council Version 1 (Tested at Shriram Institute of Industrial Research)

### POST PAINTING CARE

For removing stains, sponge clean with a mild soap solution followed by wiping with clean water. Ensure a drying time of minimum 4 weeks from application before cleaning.

### TECHNICAL DETAILS

- a. Drying time:** Surface dry time 15 min
- b. Flash point IS101/1987 Part 1, Sec 6:** Non-flammable
- d. Stability of thinned paint:** To be used within 24 hours

### PRECAUTIONS

- › Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- › Do not over-thin or over-extend the brush.
- › Use Asian Paints Universal Stainer to obtain customised shades.
- › Stir well and strain before use.
- › Tinted paints need thorough shaking immediately after stainer addition as well as before use.

### SAFETY FEATURES

- › Kindly refer to the MSDS for Asian Paints Professional Interior Emulsion which gives detailed information on safety measures while handling the paint, which is available on request.
- › Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- › Keep out of reach of children and away from eatables.
- › May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- › Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- › In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- › Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- › Do not pour leftover paint down the drain or in water courses.
- › In the event of spills, contain spillage using sand or earth.
- › No added Lead, Mercury or Chromium compounds.